



Specification Sheet

Super Fluid[®]

Universal Tractor Hydraulic Fluid




Benefits

- Ensures smooth power transfer
- Excellent wear protection
- Resistant to oxidation
- Excellent water tolerance
- Suppresses wet brake noise
- Protects against rust and corrosion
- Protects seals
- Compatible with all other tractor fluids
- Shear Stable
- Excellent filterability
- Antifoaming

Description

Super Fluid is a high performance multipurpose tractor transmission and hydraulic fluid. It is formulated with the highest quality base stocks and the latest additive technology to ensure optimum performance in equipment. Super Fluid keeps gears, pumps, and valves clean, protected and running their best.

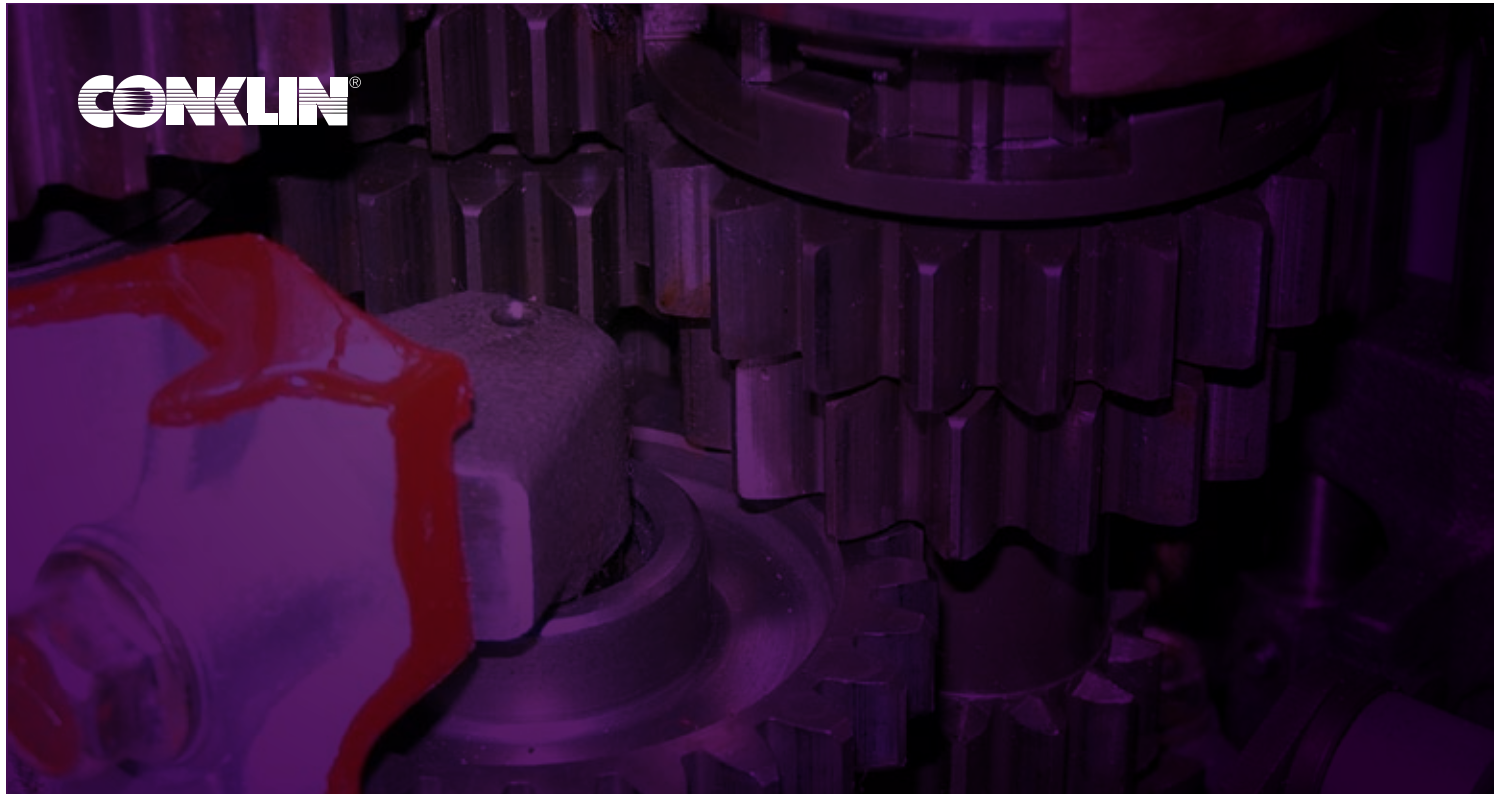

Applications

Super Fluid is recommended for top off and refill of transmissions, final drives, hydraulics, power steering, wet brakes, PTO's and hydrostatic drives.

- John Deere – J20 C/D, J21A, J14C, J14B (303 Fluid), Hy-Guard
- Massey Ferguson – M-1127 A&B, M-1141 (Permatran III), M-1129A (Permatran), M-1135, M1110
- Deutz-Allis – 272843 (IPF821), 257541, 246634
- Case – JIC-143, JIC-144, MS 1206 (Power Guard PTF), MS-1204/JIC-185, MS-1207 (Hy-Trans Plus), MS-1210/JIC-145 (TCH), MS-1205
- White – Q-1826, Q1766, Q-1722, Q-1705
- API – GL-4
- Allison – C-4, C-3, C-2
- Sundstrand Hydrostatic Transmission
- Kubota – (UDI Fluid)
- Steiger
- Versatile
- Landini
- Hesston Fiat – AF-87
- Caterpillar – TO-2 (Does Not Meet TO-4)
- IHC – B-6 (Hy-Tran), B-5
- Ford/New Holland – M2S134 A, B, C or D, M2C53-A, M2C48-B, M2C41-B, 2-C-201/200

Part Numbers

#41475	5 gallons (in two 2 1/2 gallon containers)
#41483	30 gallon
#41491	55 gallon

Specifications

Viscosity at 100°C, cSt (ASTM D-445)	9.1 cSt
Viscosity at 40°C, cSt (ASTM D-445)	58.5 cSt
Viscosity Index (ASTM D-92)	152
Flash Point °C (°F) (ASTM D-92)	197°C (387°F)
Pour Point °C (°F) (ASTM D-97)	-39°C (-39°F)